


# SSB Self Aligning Accessories

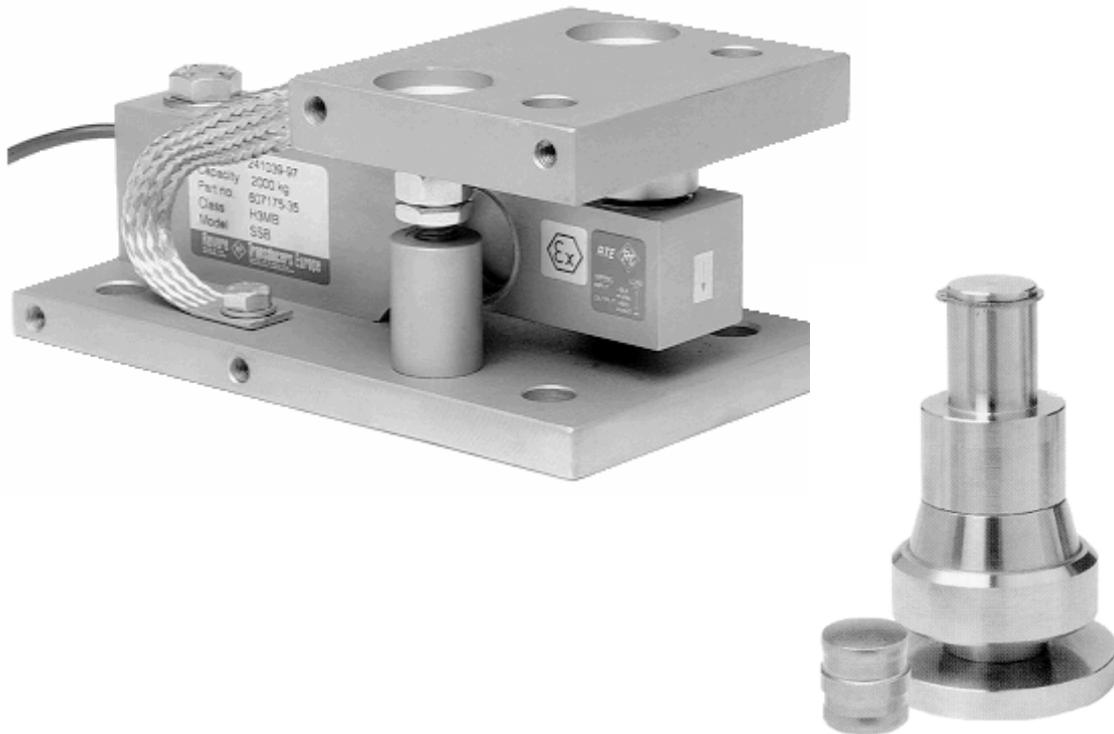

## DESCRIPTION:

The SSB self aligning silo mount, combined with the SSB load cell family, provides weighing assemblies suitable for process control, batch weighing, silo/hopper and belt scale applications.

The SSB foot assembly is an ideal solution for medium capacity belt, pallet and platform scales.



The SSB mount and foot are based on a rocker pin design, combining excellent load introduction to the transducer with an overall low profile. Hardened components are used at all load bearing surfaces. The stainless steel construction guarantees long term reliability, even in the most harsh of environments.

## FEATURES:

- Hardened components at all bearing surfaces
- Rocker pin load introduction
- Stainless steel or nickel plated steel versions available
- Built in horizontal movement control and lift-off protection
- Load cell (re)placement after installation of the mount
- Optional stay rod assembly
- **Capacities: 500 → 5000kg**

## Self Aligning Mount

The SSB mount permits controlled horizontal movement in all directions. The design allows the load cell to be (re)placed after installation of the mount. The critical load introduction area is mechanically protected.

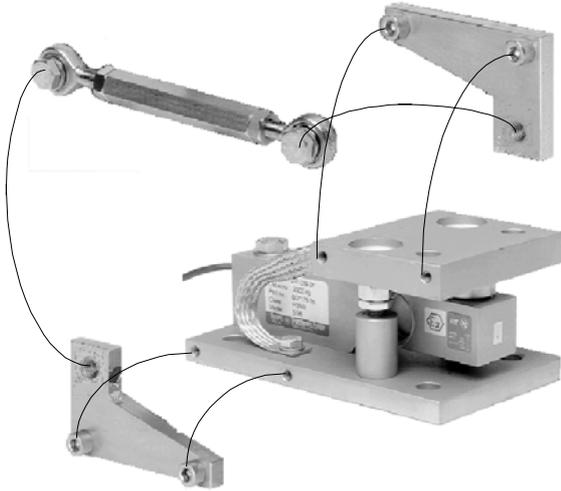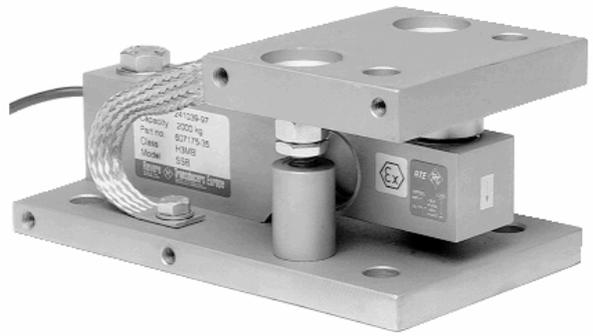

## Stay Rod Assembly

If major load movement is anticipated stay rods should be used to restrain a platform or vessel. The SSB stay rod assembly can be bolted to the mount prior to, or after its installation.

## Non Adjustable Foot

The non-adjustable foot carries the same specification and features as the height adjustable version, while providing an even lower overall profile.



## Height Adjustable Foot

The stainless steel foot, which has 5mm of height adjustment, provides excellent load introduction to the load cell. The foot allows flexibility in platform design without compromising overall system performance.



*Further information:*

		Height, assembly + SSB (0.5 - 2t)	Height, assembly + SSB (5t)
Self Aligning Mount	mm	95	135
Height Adj. Foot	mm	80+5	141+7
Non Adj. Foot	mm	75	117

Mount / Foot	Assembly Guidelines	Outline drawing (0.5-2t)		Outline drawing (5t)	
		Stainless steel	Nickel plated	Stainless steel	Nickel plated
Self Aligning Mount	AG 05/7-108/01	499046-10	499046-00	499047-10	499047-00
Stay Rod Assembly	AG 09/7-201/01	499063-10	499063-00	499064-10	499064-00
Height Adj. Foot		499079		499080	
Non Adj. Foot		499077		499078	

### **INSTROTECH AUSTRALIA**

P O Box 3137  
 Newton SA 5073  
 Australia  
 Tel: (08) 8337 8033  
 Fax: +61 8 8337 8656  
 E-mail: sales@instrotech.com.au